
carrara


porcelain collection
(color body-digital technology)



MARBLE SYSTEMS

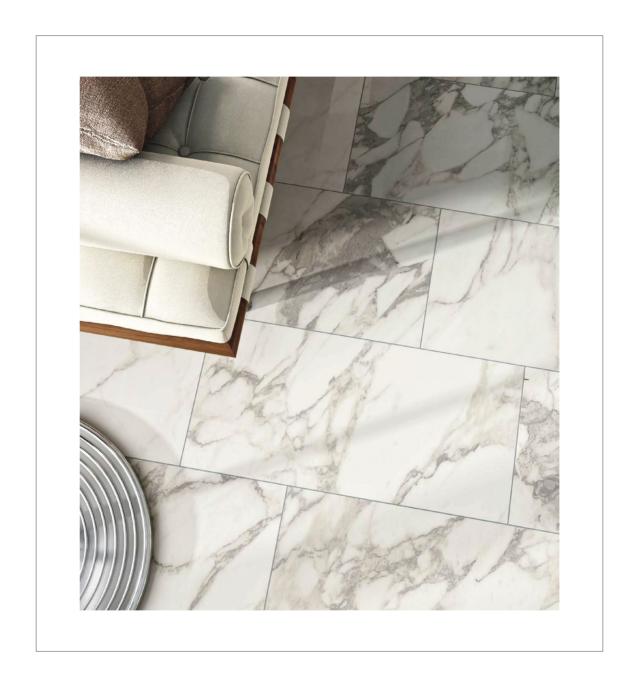

floor/wall tiles



WIS11960 carrara arabescato rectified & polished 12"x24" in stock



WIS11961 carrara blu rectified & polished 12"x24" in stock



WIS11962 carrara paonazzo rectified & polished 12"x24" in stock



WIS11963 carrara venato rectifed & polished 12"x24" in stock


More sizes or finishes may be available through special order. Please contact your sales representative for more details.





technical information

Technical Characteristics	Astm	Required	Results
Water Absorption	C373	Max. 0.5%	≤0.1%
Thickness Dimension	C499	Range 0.04 Max	≤0.04
Facial Dimension	C499	± 0.25%	≤0.25%
Warpage Average	C485	± 0.40% On Any Edge	≤ ± .40%
Warpage Average	C485	± 0.40% On Diagonal	≤ ± .40%
Wedging Average	C502	± 0.25%	≤ ± 0.25%
Bond Strength	C482	50 Psi Or Greater	> 200 Psi
Deep Abrasion	C1243	≤175mm3	<150mm3
Hardness (Mohs)		No Requirement	≥ 7
Frost Resistance (Freeze/Thaw)	C1026	No Sample Must Show Alterations To Surface	No Cracking Or Spalling Occurred
Chemical Resistance	C650	No Requirement	Class A
Break Strength	C648	250 lbf Or Greater	≥ 350 lbf
Coefficient Of Friction (Static)	C1028	No Requirement	≥ 0.79 Dry ≥ 0.60 Wet
Coefficient Of Friction (Dynamic)	Dcof Acutest Sm (Wet)	≥ 0.42	≥ 0.42



V1 = UNIFORM APPEARANCE: Differences among pieces from the same production run are minimal.

MARBLE SYSTEMS

www. marble systems. com

COPYRIGHT © 2023 MARBLE SYSTEMS, INC.









