

reside
porcelain collection



MARBLE SYSTEMS



floor / wall tiles




WIS13155
reside ash honed
12"x24"x5/16"
in stock



WIS13147
reside ash honed
24"x48"x5/16"
in stock



WIS13151
reside ash R11 textured
24X48X5/16
in stock

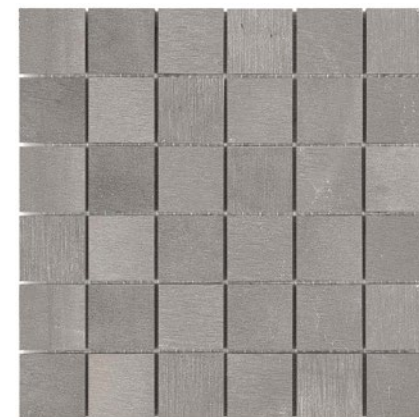

WIS13175
reside ash honed straight joint
2"x2" 12"x12"
in stock



WIS13179
reside ash honed
4"x24"x5/16"
in stock



reside black honed

floor / wall tiles



WIS13157
reside black honed
12"x24"x5/16"
in stock



WIS13149
reside black honed
24"x48"x5/16"
in stock



WIS13153
reside black R11 textured
24X48X5/16
in stock



WIS13177
reside black honed straight joint
2"x2" 12"x12"
in stock



WIS13181
reside black honed
4"x24"x5/16"
in stock



reside brown honed

floor / wall tiles



WIS13158
 reside brown honed
 12"x24"x5/16"
 in stock



WIS13150
 reside brown honed
 24"x48"x5/16"
 in stock



WIS13154
 reside brown R11 textured
 24X48X5/16
 in stock



WIS13175
 reside brown honed straight joint
 2"x2" 12"x12"
 in stock



WIS13182
 reside brown honed
 4"x24"x5/16"
 in stock



reside beige honed

floor / wall tiles



WIS13156
reside beige honed
12"x24"x5/16"
in stock



WIS13148
reside beige honed
24"x48"x5/16"
in stock



WIS13152
reside beige R11 textured
24X48X5/16
in stock



WIS13176
reside beige honed straight joint
2"x2" 12"x12"
in stock



WIS13180
reside beige honed
4"x24"x5/16"
in stock



reside ash honed

technical information

physical properties	astm test	industry standards	results
water absorption	C373	Impervious <0.5%	≤ 0.1%
thickness dimension	C499	Range ±0.04in Max	≤ ±0.04 In
facial dimension	C499	±0.25%	≤ ±0.25%
warpage average	C485	± 0.40% On Any Edge	≤ ± 0.40%
warpage average	C485	± 0.40% On Diagonal	≤ ± 0.40%
warpage average	C502	± 0.25%	≤ ± 0.25%
bond strength	C482	≥ 50 Psi	≥ 200 Psi
breaking strength	C648	≥ 250 Lbf	≥ 400 Lbf
hardness (mohs)	Scratch Test (No Regulated)	Range 0 - 10	≥ 7
visible abrasion resistance for glaze tile	C1027	No Requirement Range 0 - 5	Class 4
frost resistance (freeze/thaw)	C1026	No Sample Must Show Alterations To Surface	No Evidence Of Damage
chemical resistance	C650	No Requirement Range E - A	Class A
stain resistance	C1378	No Requirement Range E - A	Class A*
coefficient of friction (dynamic)	Dcof Acutest SM (Wet)	≥ 0.42	≥ 0.42*
aesthetic classification	Visual Evaluation Shade & Texture	No Requirement Range V0 - V4	V2

*All values given are for matte or honed material. No values are given for polished material. We do not recommend polished surfaces in area subject to exposure from grease, oil or water.
For level interior spaces to be walked upon when wet (see ANSI A137.1 section 6.2.2.1.10 – Section 9.6 for test procedure).

MARBLE SYSTEMS

www.marblesystems.com

COPYRIGHT © 2025 MARBLE SYSTEMS, INC.



[marblesystemsinc](#)



[marblesystems1](#)



[marblesystems1](#)



[marblesystems](#)



[marblesystems](#)